




> LFPAK56

The automotive Power-SO8 that packs a punch


Providing a true alternative to DPAK and D²PAK, Nexperia's LFPAK56 portfolio gives industry leading performance in a truly innovative automotive grade package. Saving a considerable amount of space compared to traditional D²PAK and DPAK solutions, the LFPAK56 offers designers flexibility and reliability without compromising thermal performance.

Thermal Performance




- > Copper clip technology
- > High power density
- > Small footprint

Ultra Low On-Resistance




- > 1.4mΩ @ 40V
- > No internal wire bonds
- > Best-in-class performance


Reliable & Manufacturable



- > Best-in-class board level reliability
- > Easy optical inspection
- > Robust solder joints




High Current Rating



- > Up to 120 A current rating
- > High transient robustness
- > High-current, short-circuit capability

LFPAK56 Footprint Comparison

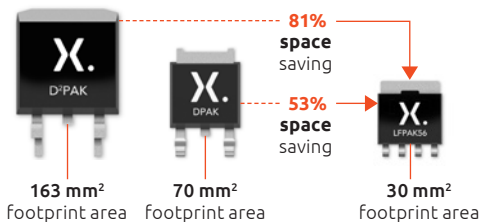

LFLPAK56 Product Range (AEC-Q101 qualified)

40 V range	R_{DSon} [max] @ $V_{GS} = 10\text{ V}$ (m Ω)	R_{DSon} [max] @ $V_{GS} = 5\text{ V}$ (m Ω)	I_D [max] (A)	$R_{th(j-mb)}$ [max] (K/W)
*BUK7J1R4-40H	1.4		120	0.38
BUK7Y1R7-40H	1.7		120	0.51
BUK7Y2R0-40H	2		120	0.69
BUK7Y2R5-40H	2.5		120	0.92
BUK7Y3R0-40H	3		120	1.13
BUK7Y3R5-40H	3.5		120	1.3
BUK9Y3R0-40E	2.5	3	100	0.77
BUK7Y3R5-40E	3.5		100	0.9
BUK9Y3R5-40E	3.6	3.8	100	0.9
BUK9Y4R4-40E	3.7	4.4	100	1.02
BUK7Y4R4-40E	4.4		100	1.02
BUK9Y7R6-40E	6	7.6	79	1.58
BUK7Y7R6-40E	7.6		79	1.58
BUK9Y12-40E	10	12	52	2.31
BUK7Y12-40E	12		52	2.31
BUK9Y21-40E	17	21	33	3.33
BUK7Y21-40E	21		33	3.33
BUK9Y29-40E	25	29	25	4.03
BUK7Y29-40E	29		26	4.03

60 V range	R_{DSon} [max] @ $V_{GS} = 10\text{ V}$ (m Ω)	R_{DSon} [max] @ $V_{GS} = 5\text{ V}$ (m Ω)	I_D [max] (A)	$R_{th(j-mb)}$ [max] (K/W)
BUK9Y4R8-60E	4.1	4.8	100	0.63
BUK7Y4R8-60E	4.8		100	0.63
BUK9Y6R0-60E	5.2	6	100	0.77
BUK9Y7R2-60E	5.6	7.2	100	0.9
BUK7Y6R0-60E	6		100	0.77
BUK7Y7R2-60E	7.2		100	0.9
BUK9Y8R7-60E	7.5	8.7	86	1.02
BUK7Y8R7-60E	8.7		87	1.02
BUK9Y15-60E	13	15	53	1.58
BUK7Y15-60E	15		53	1.59
BUK9Y25-60E	21	25	34	2.31
BUK7Y25-60E	25		34	2.31
BUK9Y43-60E	38	43	22	3.33
BUK7Y43-60E	43		22	3.33
BUK9Y59-60E	52	59	16	4.03
BUK7Y59-60E	59		17	4.03

80 V range	R_{DSon} [max] @ $V_{GS} = 10\text{ V}$ (m Ω)	R_{DSon} [max] @ $V_{GS} = 5\text{ V}$ (m Ω)	I_D [max] (A)	$R_{th(j-mb)}$ [max] (K/W)
BUK7Y7R8-80E	7.8		100	0.63
BUK9Y8R5-80E	8	8.5	100	0.63
BUK7Y9R9-80E	9.9		89	0.77
BUK9Y11-80E	10	11	84	0.77
BUK7Y14-80E	14		65	1.02
BUK9Y14-80E	14	15	62	1.02
BUK7Y25-80E	25		39	1.58
BUK9Y25-80E	25	27	37	1.58
BUK7Y41-80E	41		25	2.31
BUK9Y41-80E	41	45	24	2.33
BUK7Y72-80E	72		16	3.33
BUK9Y72-80E	72	78	15	3.33
BUK7Y98-80E	98		12	4.03
BUK9Y107-80E	98	107	11	4.03

100 V range	R_{DSon} [max] @ $V_{GS} = 10\text{ V}$ (m Ω)	R_{DSon} [max] @ $V_{GS} = 5\text{ V}$ (m Ω)	I_D [max] (A)	$R_{th(j-mb)}$ [max] (K/W)
BUK9Y12-100E	11	12	85	0.63
BUK7Y12-100E	12		85	0.63
BUK9Y15-100E	14	15	69	0.77
BUK7Y15-100E	15		68	0.77
BUK9Y19-100E	18	19	56	0.9
BUK7Y19-100E	19		56	0.9
BUK9Y22-100E	21	22	49	1.02
BUK7Y22-100E	22		49	1.02
BUK9Y38-100E	37	38	30	1.58
BUK7Y38-100E	38		30	1.58
BUK9Y65-100E	63	65	19	2.31
BUK7Y65-100E	65		19	2.31
BUK9Y113-100E	110	113	12	3.33
BUK7Y113-100E	113		12	3.33
BUK9Y153-100E	146	153	9.4	4.03
BUK7Y153-100E	153		9.4	4.03

Products in italic and bold are the latest Trench 9 silicon technology
***New enhanced LFLPAK56E package**

© 2017 Nexperia B.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Date of release:
August 2017