



## Chip beads

For general signal line

Soft termination

**KMZ-HR series (for automobiles)**

# KMZ1608-HR<sub>type</sub>

---

**KMZ1608-HR      1608[0603 inch]\***

\* Dimensions code JIS[EIA]

---

## REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

### SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

#### REMINDERS

- The storage period is less than 12 months. Be sure to follow the storage conditions (Temperature: 5 to 40°C, Humidity: 10 to 75% RH or less).  
If the storage period elapses, the soldering of the terminal electrodes may deteriorate.
- Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).
- Before soldering, be sure to preheat components.  
The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications.  
If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.
- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Carefully lay out the coil for the circuit board design of the non-magnetic shield type.  
A malfunction may occur due to magnetic interference.
- Use a wrist band to discharge static electricity in your body through the grounding wire.
- Do not expose the products to magnets or magnetic fields.
- Do not use for a purpose outside of the contents regulated in the delivery specifications.
- The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.  
The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.  
If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us.

- (1) Aerospace/Aviation equipment
- (2) Transportation equipment (electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.

# Chip beads

## For general signal line

### Soft termination

Product compatible with RoHS directive  
Halogen-free  
Compatible with lead-free solders  
AEC-Q200

# Overview of KMZ1608-HR type

## FEATURES

- Noise reduction solution for general signal line.
- Various frequency characteristics with 6 materials of different features for countermeasures against everything from general signals to high-speed signals.
- Guide electric property resin absorbs external stress, and mechanical stress, resistance force to thermal shock is improved.
- Easing by conductive resin thermal stress, and respond for High-temperature environment of 150 °C, too.

## APPLICATION

Various ECUs, powertrains, body controls, and car multimedia (telematics).

## PART NUMBER CONSTRUCTION


| Series name | LxWxT dimensions (mm) | Material name | Specifications (Grade) | Impedance (Ω) at 100MHz | Characteristic type | Packaging style | Internal code |
|-------------|-----------------------|---------------|------------------------|-------------------------|---------------------|-----------------|---------------|
| KMZ1608     | 1.6x0.8x0.6           | A             | HR<br>Soft termination | 601                     | C                   | T<br>Taping     | DH5           |
|             | 1.6x0.8x0.8           | B             |                        | 102                     |                     |                 |               |
|             |                       | D             |                        |                         | A                   |                 | D25           |
|             |                       | R             |                        |                         | B                   |                 |               |
|             |                       | S             |                        |                         |                     |                 |               |
|             |                       | Y             |                        |                         |                     |                 |               |

## OPERATING TEMPERATURE RANGE, PACKAGE QUANTITY, PRODUCT WEIGHT

| Type       |               | Temperature range          |                           | Package quantity (pieces/reel) | Individual weight (mg) |
|------------|---------------|----------------------------|---------------------------|--------------------------------|------------------------|
|            |               | Operating temperature (°C) | Storage temperature* (°C) |                                |                        |
| KMZ1608-HR | t=0.6mm (DH5) | -55 to +150                | -55 to +150               | 4,000                          | 3                      |
|            | t=0.8mm (D25) | -55 to +150                | -55 to +150               | 4,000                          | 4                      |


\* The storage temperature range is for after the circuit board is mounted.

- RoHS Directive Compliant Product: See the following for more details. <https://product.tdk.com/info/en/environment/rohs/index.html>
- Halogen-free: Indicates that Cl content is less than 900ppm, Br content is less than 900ppm, and that the total Cl and Br content is less than 1500ppm.

 Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

# KMZ1608-HR type

## RECOMMENDED REFLOW PROFILE

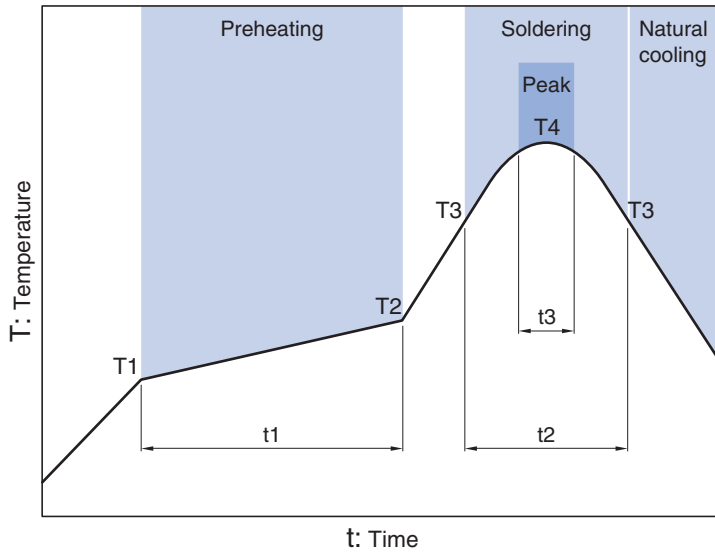

| Preheating |       |            | Soldering |           | Peak         |      |
|------------|-------|------------|-----------|-----------|--------------|------|
| Temp.      |       | Time       | Temp.     | Time      | Temp.        | Time |
| T1         | T2    | t1         | T3        | t2        | T4           | t3   |
| 150°C      | 180°C | 60 to 120s | 230°C     | 30 to 60s | 250 to 260°C | 10s  |

# KMZ1608-HR type

## MATERIAL CHARACTERISTIC

**B material:** This type is perfectly suited for fast digital signals. By equalizing R components and X components that beads possess at a frequency of 5MHz, it is able to suppress overshooting, undershooting and ringing of fast digital signals.

**R material:** For wide frequency applications calling for broad impedance characteristics. For digital signal line applications calling requiring good waveform integrity. Impedance values selected for effectiveness at 10 to 200MHz.


**S material:** Standard type that features impedance characteristics similar to those of a typical ferrite core. For signal line applications in which the blocking region is near 100MHz. Impedance values selected for effectiveness at 40 to 300MHz.

**Y material:** High frequency range type intended for the 100MHz region and above. For signal line applications in which the signal frequency is far from the cutoff frequency. Impedance values selected for effectiveness at 80 to 400MHz.

**A material:** This high-impedance product is based on the impedance frequency characteristics of our Y-material. The product offers excellent impedance characteristics, which is greater than  $2500\Omega$ , in the vicinity of 100MHz range (KMZ1608AHR252B).



**D material:** For applications calling for low insertion loss at low frequencies and sharply increasing impedance at high frequencies. Designed for high impedance at high frequencies (300MHz to 1GHz) for signal line applications.

## TYPICAL MATERIAL IMPEDANCE CHARACTERISTICS

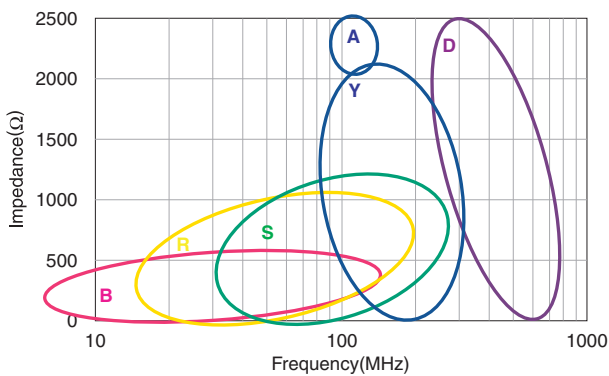


# KMZ1608-HR type

## SHAPE & DIMENSIONS

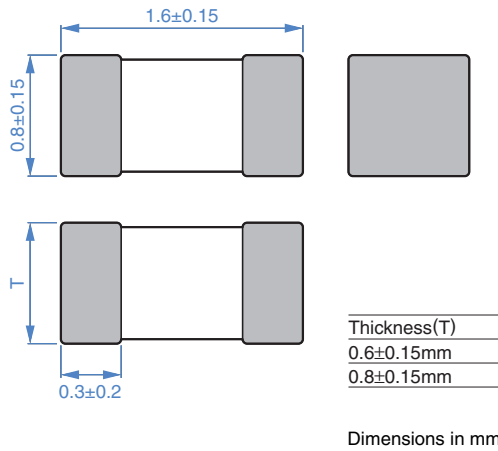

## RECOMMENDED LAND PATTERN



# KMZ1608-HR type

## ELECTRICAL CHARACTERISTICS

### CHARACTERISTICS SPECIFICATION TABLE

| Impedance<br>[100MHz]<br>( $\Omega$ ) |            | DC resistance<br>( $\Omega$ )max. | Rated current*<br>(mA)max. | Thickness T<br>(mm) | Part No.           |
|---------------------------------------|------------|-----------------------------------|----------------------------|---------------------|--------------------|
|                                       | Tolerance  |                                   |                            |                     |                    |
| 600                                   | $\pm 25\%$ | 0.4                               | 500                        | 0.6                 | KMZ1608BHR601CTDH5 |
| 1000                                  | $\pm 25\%$ | 0.6                               | 300                        | 0.8                 | KMZ1608BHR102CTD25 |
| 60                                    | $\pm 25\%$ | 0.1                               | 800                        | 0.8                 | KMZ1608RHR600ATD25 |
| 120                                   | $\pm 25\%$ | 0.18                              | 500                        | 0.8                 | KMZ1608RHR121ATD25 |
| 600                                   | $\pm 25\%$ | 0.4                               | 500                        | 0.8                 | KMZ1608RHR601ATD25 |
| 1000                                  | $\pm 25\%$ | 0.5                               | 400                        | 0.8                 | KMZ1608RHR102ATD25 |
| 120                                   | $\pm 25\%$ | 0.15                              | 500                        | 0.8                 | KMZ1608SHR121ATD25 |
| 600                                   | $\pm 25\%$ | 0.35                              | 500                        | 0.8                 | KMZ1608SHR601ATD25 |
| 1000                                  | $\pm 25\%$ | 0.5                               | 400                        | 0.8                 | KMZ1608SHR102ATD25 |
| 60                                    | $\pm 25\%$ | 0.15                              | 500                        | 0.8                 | KMZ1608YHR600BTD25 |
| 120                                   | $\pm 25\%$ | 0.2                               | 500                        | 0.8                 | KMZ1608YHR121BTD25 |
| 300                                   | $\pm 25\%$ | 0.3                               | 500                        | 0.8                 | KMZ1608YHR301BTD25 |
| 600                                   | $\pm 25\%$ | 0.4                               | 500                        | 0.8                 | KMZ1608YHR601BTD25 |
| 1000                                  | $\pm 25\%$ | 0.5                               | 400                        | 0.8                 | KMZ1608YHR102BTD25 |
| 1500                                  | $\pm 25\%$ | 0.6                               | 300                        | 0.8                 | KMZ1608YHR152BTD25 |
| 2500                                  | $\pm 25\%$ | 0.8                               | 200                        | 0.8                 | KMZ1608AHR252BTD25 |
| 50                                    | $\pm 25\%$ | 0.25                              | 500                        | 0.6                 | KMZ1608DHR500CTDH5 |
| 120                                   | $\pm 25\%$ | 0.3                               | 400                        | 0.6                 | KMZ1608DHR121CTDH5 |
| 240                                   | $\pm 25\%$ | 0.6                               | 300                        | 0.8                 | KMZ1608DHR241CTD25 |


\* Please refer to the graph of rated current vs. temperature characteristics (derating) about the rating current at 125°C or more in temperature of the product.

#### Measurement equipment

| Measurement item | Product No.   | Manufacturer          |
|------------------|---------------|-----------------------|
| Impedance        | E4991A+16192A | Keysight Technologies |
| DC resistance    | Type-7556     | Yokogawa              |

\* Equivalent measurement equipment may be used.

#### Rated current vs. temperature characteristics (derating)

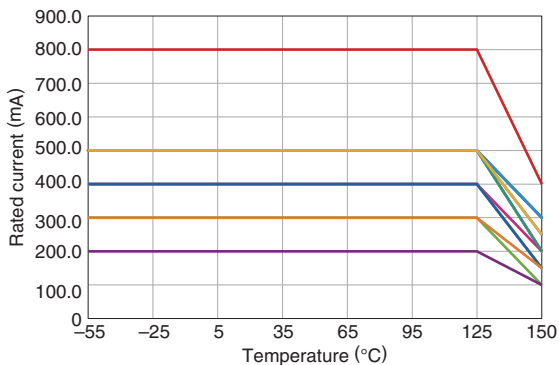

|                    |                                       |
|--------------------|---------------------------------------|
| — RHR600A          | — RHR121A, SHR121A, YHR600B, YHR121B, |
| — YHR301B, DHR500C | — BHR601C, RHR601A, SHR601A, YHR601B  |
| — SHR102A          | — RHR102A, YHR102B, DHR121C           |
| — BHR102C, DHR241C | — YHR152B                             |
|                    | — AHR252B                             |


⚠ Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use.  
Please note that the contents may change without any prior notice due to reasons such as upgrading.

# KMZ1608-HR type


## ELECTRICAL CHARACTERISTICS

### Z VS. FREQUENCY CHARACTERISTICS (BY SERIES)


**KMZ1608BHR series**

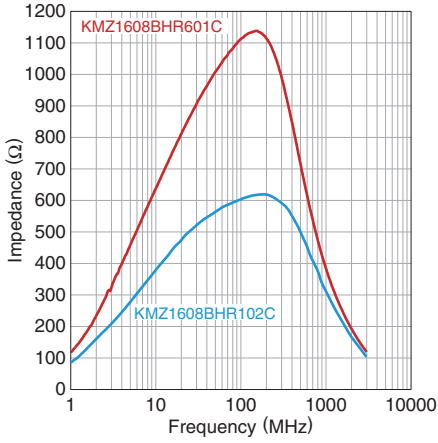


**KMZ1608RHR series**

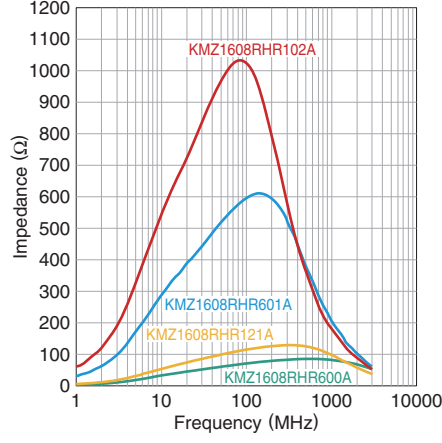


**KMZ1608SHR series**

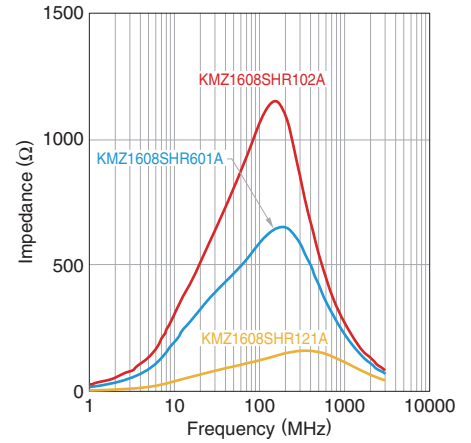


**KMZ1608YHR series**

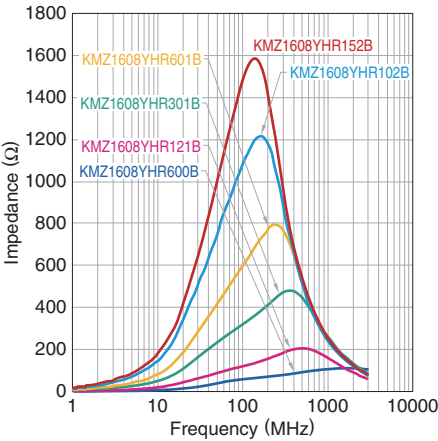


**KMZ1608AHR series**

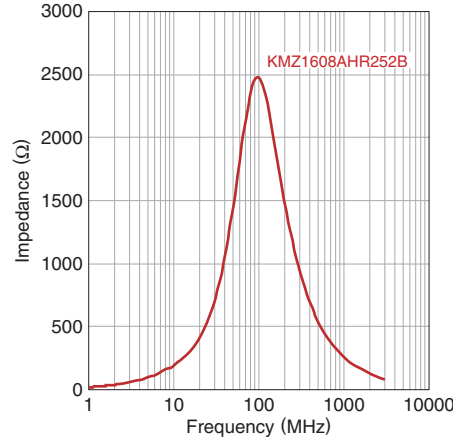

**KMZ1608DHR series**

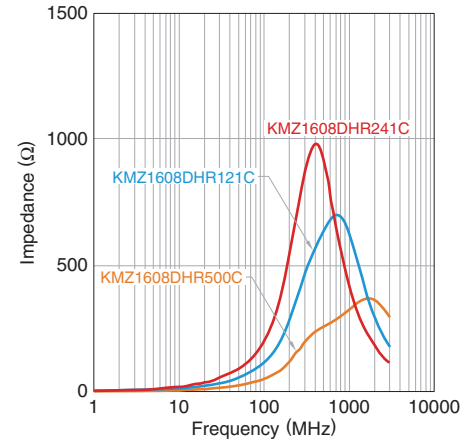

 Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.




# KMZ1608-HR type


## ELECTRICAL CHARACTERISTICS

### Z, X, R VS. FREQUENCY CHARACTERISTICS


**KMZ1608BHR601CTDH5**

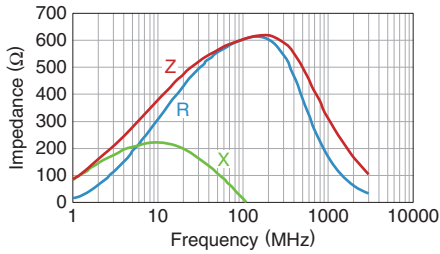


**KMZ1608BHR102CTD25**

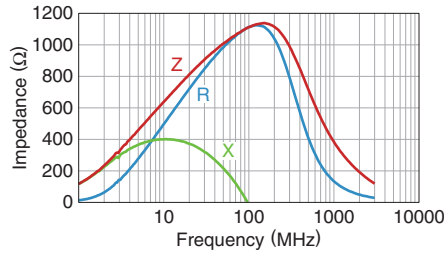


**KMZ1608RHR600ATD25**

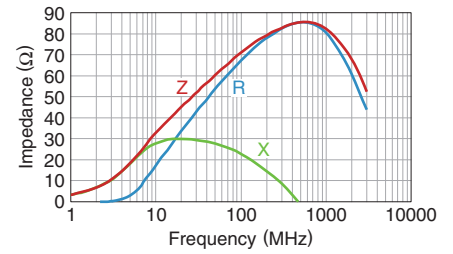


**KMZ1608RHR121ATD25**

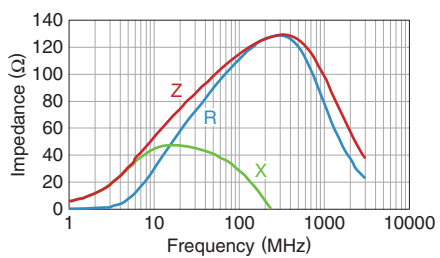


**KMZ1608RHR601ATD25**

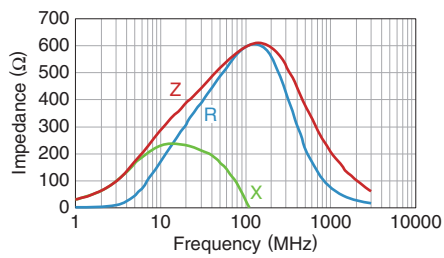


**KMZ1608RHR102ATD25**

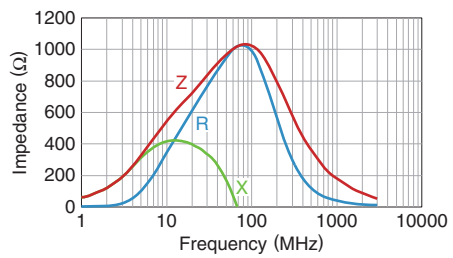


**KMZ1608SHR121ATD25**

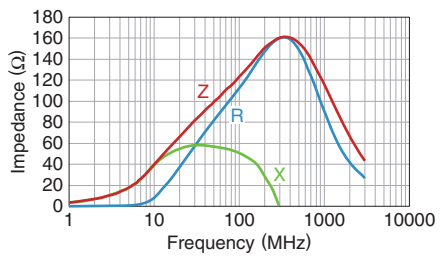


**KMZ1608SHR601ATD25**

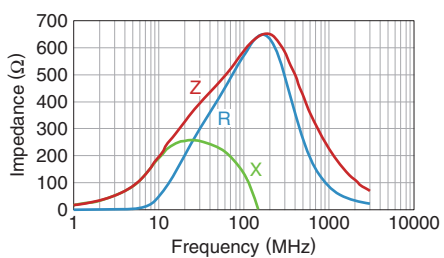


**KMZ1608SHR102ATD25**

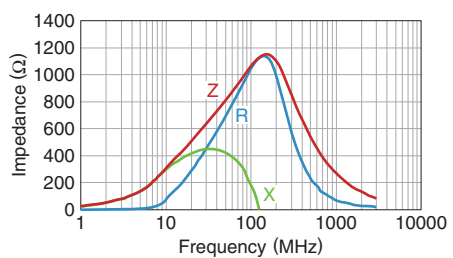


**KMZ1608YHR600BTD25**

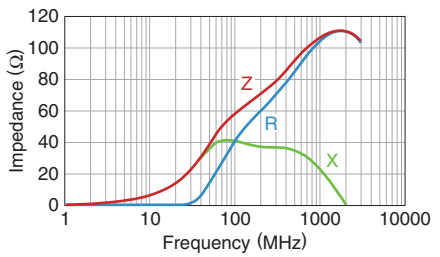


**KMZ1608YHR121BTD25**

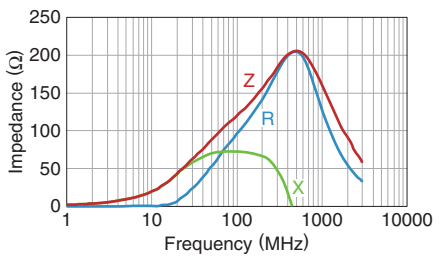


**KMZ1608YHR301BTD25**

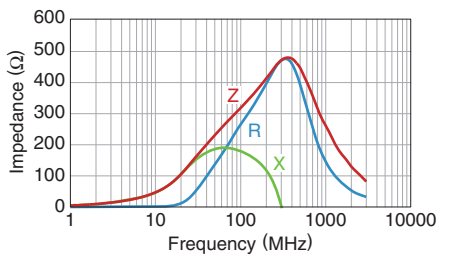


**KMZ1608YHR601BTD25**

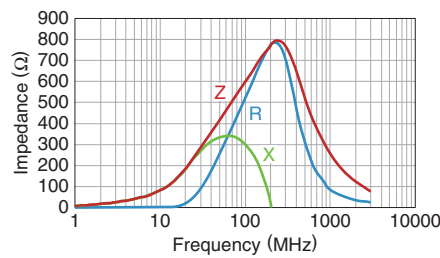


**KMZ1608YHR102BTD25**

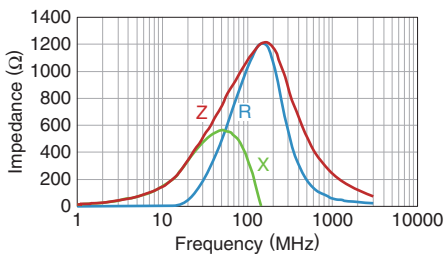

**KMZ1608YHR152BTD25**

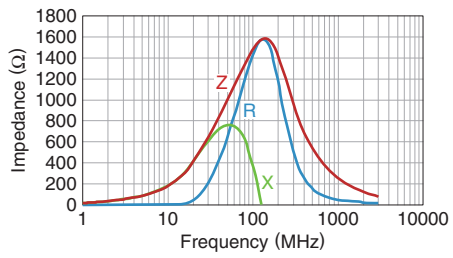


 Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

# KMZ1608-HR type


## ELECTRICAL CHARACTERISTICS

### Z, X, R VS. FREQUENCY CHARACTERISTICS


**KMZ1608AHR252BTD25**

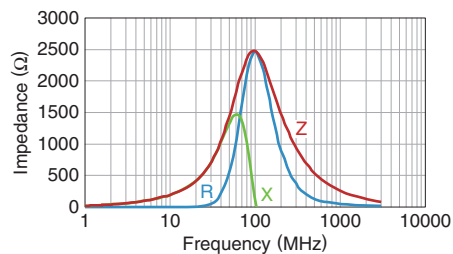


**KMZ1608DHR500CTDH5**

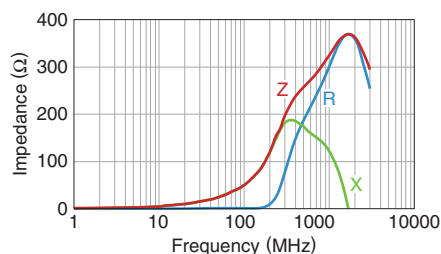

**KMZ1608DHR121CTDH5**

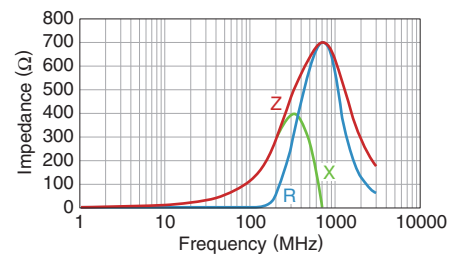


**KMZ1608DHR241CTD25**

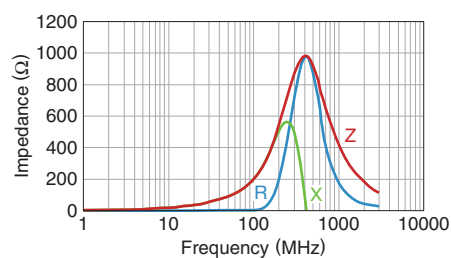


# KMZ1608-HR type

## PACKAGING STYLE

### REEL DIMENSIONS

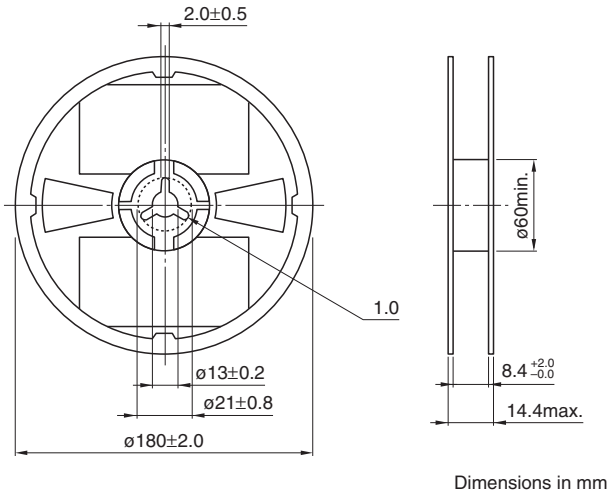

### TAPE DIMENSIONS

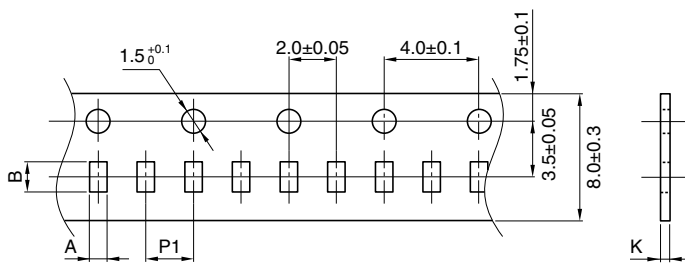

| Type       | A             | B             | P1            | K       |
|------------|---------------|---------------|---------------|---------|
| KMZ1608-HR | $1.1 \pm 0.2$ | $1.9 \pm 0.2$ | $4.0 \pm 0.1$ | 1.1max. |

