




# POWER SHUNTS

## BATTERY AND METER CURRENT SENSE RESISTORS



# IN A NUTSHELL

### THE GENERAL APPLICATION AREAS OF THE VARIOUS CURRENT SENSORS

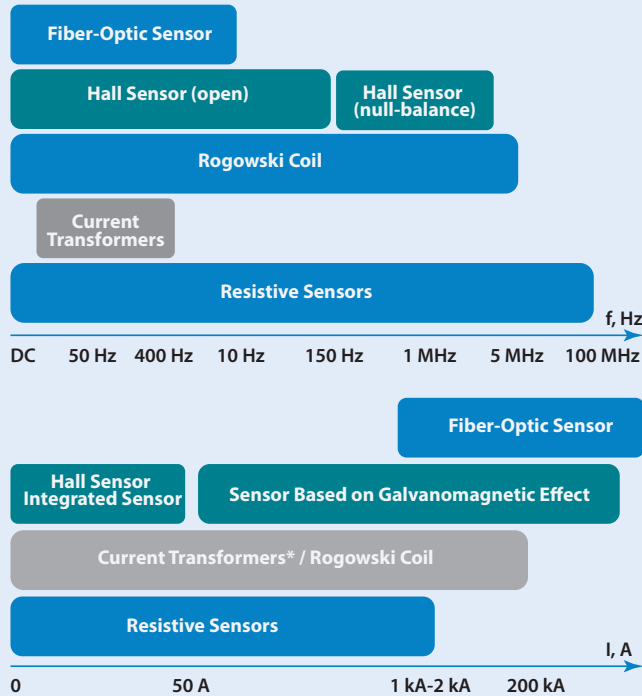


\* For alternative current only

### APPLICATIONS

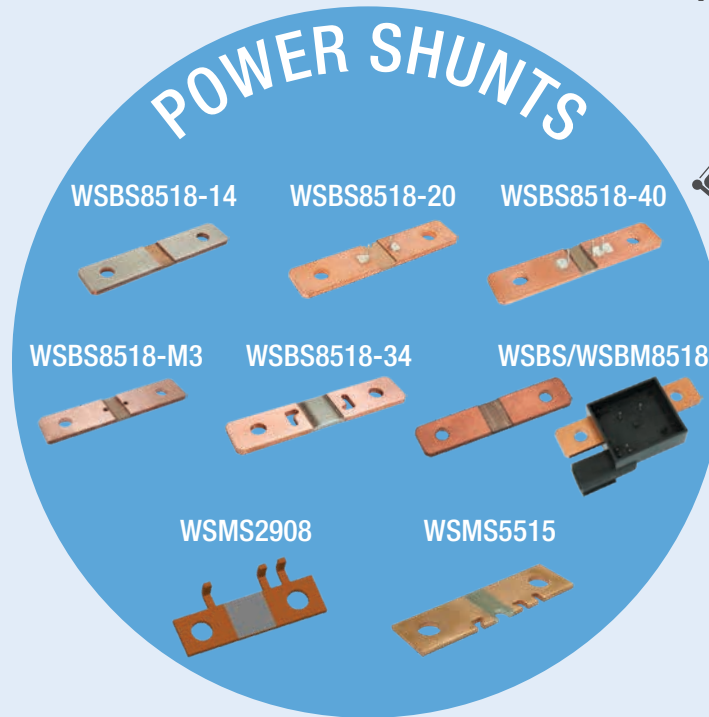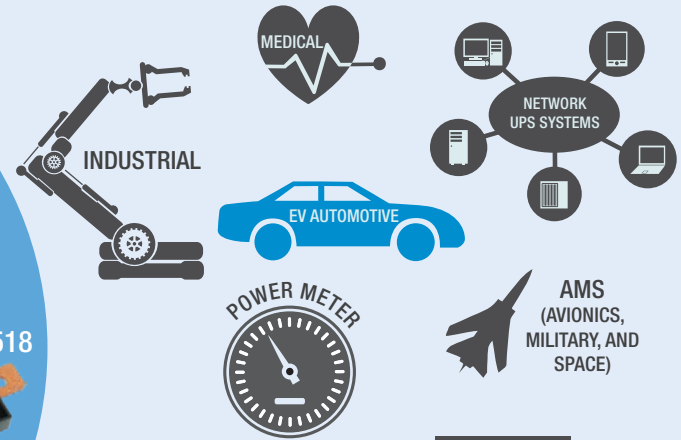

### FOOTPRINT

Shown in actual size (mm)

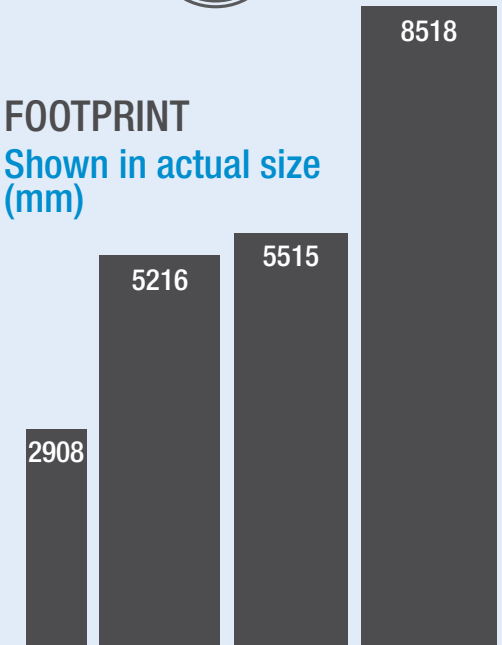

#### Features

- High power (up to 36 W)
- Pulse performance (> 1 kA)
- Stabilization available for low  $\Delta R$
- Not ESD-sensitive

#### Custom Options

- Plated terminals
- Sense pins
- Shapes / sizes
- Molded body / connectors
- Improved RTC / thermal EMF alloys available

For Technical Questions: [ww2cresistors@vishay.com](mailto:ww2cresistors@vishay.com)