



250-U2 U.2 FPGA Accelerator




UltraScale+ on U.2 Form Factor

Fully programmable FPGA processor for NVMe acceleration

BittWare's 250-U2 is a Computational Storage Processor conforming to the U.2 form factor. It features a Xilinx Kintex UltraScale+ FPGA directly coupled to local DDR4 memory. This energy-efficient, flexible compute node is intended to be deployed within conventional U.2 NVMe storage arrays (approximately 1:8 ratio) allowing FPGA-accelerated instances of:

- Erasure Coding and Deduplication
- Compression, Encryption & Hashing
- String/Image Search and Database Sort/ Join/Filter
- Machine Learning Inference

The 250-U2 can be wholly programmed by customers developing in-house capabilities or delivered as a ready-to-run pre-configured solution featuring Eideticom's NoLoad® IP. The 250-U2 is front-serviceable in a 1U chassis and can be mixed in with storage units in the same server, allowing users to mix-and-match storage and acceleration.

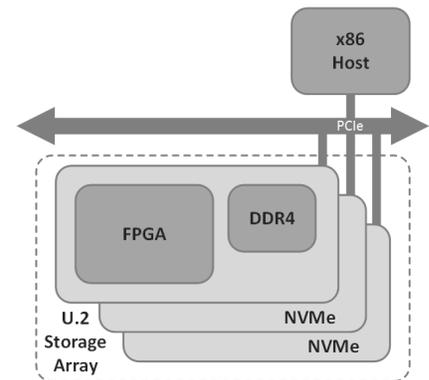


key features

Ideal for
U.2 NVMe
storage arrays

KU15P FPGA:
1.1 million LCs
Kintex UltraScale+

Up to
16 GBytes
DDR4

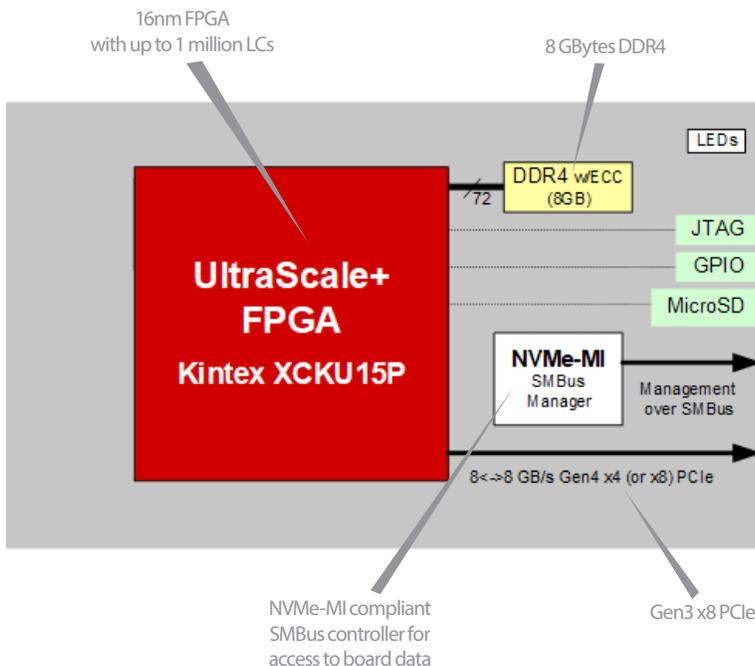

Order your 250-U2 pre-configured with Eideticom's NoLoad:

- Plug-and-play solution
- NVMe compatible and standards-based with no OS changes
- Reduced TCO/TCA - lower power and reduced IO
- CPU offload improves QoS up to 40x
- Disaggregates compute and storage into independently scalable resources
- CPU agnostic
- Reconfigurable accelerators, enabling scalable compute architectures

Learn more at www.eideticom.com

Additional Services

Take advantage of BittWare's range of design, integration, and support options



Customization

Additional specification options or accessory boards to meet your exact needs.




Server Integration

Available pre-integrated in our [TeraBox servers](#) in a range of configurations.



Application Optimization

Ask about our services to help you port, optimize, and benchmark your application.



Service and Support

BittWare Developer Site provides online documentation and issue tracking.

Specifications

FPGA	<ul style="list-style-type: none"> Xilinx Kintex UltraScale+ <ul style="list-style-type: none"> KU15P in an FFVA1156 package Core speed grade -2 Contact BittWare for KU11P FPGA option
On-board DDR4 SDRAM	<ul style="list-style-type: none"> One bank of DDR4 SDRAM x 72 bits 8GB bank (16GB version also available) Transfer Rate: 2400 MT/s
Host interface	<ul style="list-style-type: none"> U.2 Connector Compliant to SFF-8639
Datacenter deployment	<ul style="list-style-type: none"> On-board NVMe-MI compliant SMBus controller (Spec. 1.0a) Field flash update via software or SMBus SMBus FPGA flash control: anti-bricking, fallback and multiboot SMBus access to unique board data and temperature sensor
Back panel features	<ul style="list-style-type: none"> User LEDs accessible Reset switch to restore factory settings
Development features	<ul style="list-style-type: none"> JTAG connector for access to the FPGA, flash and debug tools GPIO connector MicroSD connector
Power supply monitoring & reporting	<ul style="list-style-type: none"> Voltage monitoring Temperature monitoring Fault condition reporting to FPGA

Cooling	<ul style="list-style-type: none"> U.2 drive case optimized for cooling with passive heatsink
Electrical	<ul style="list-style-type: none"> Hot swapping tolerant On-card power derived from U.2 supplies Power dissipation is application dependent Typical FPGA power consumption ~20W Card designed to deliver up to 25W power consumption
Environmental	<ul style="list-style-type: none"> Operating temperature: 5°C to 35°C Cooling: air convection
Quality	<ul style="list-style-type: none"> Manufactured to ISO9001:2008 IPC JSTD-001 -Class III RoHS compliant
Form factor	<ul style="list-style-type: none"> U.2 compliant 2.5" Drive Form Factor Height: 15mm

Development Tools

FPGA development	BIST - Built-In Self-Test for CentOS 7 provided with source code (pinout, gateway, PCIe driver and host test application)
Application development	Xilinx Tools - Vivado Design Suite HLx Editions: HDL and C/C++ with HLS

Deliverables

- 250-U2 FPGA board
- Built-In Self-Test (BIST)
- Eideticom NoLoad pre-installed (optional)
- 1-year access to online Developer Site
- 1-year hardware warranty
- Contact BittWare for extended warranty and support options

To learn more, visit www.BittWare.com

Rev 2019.07.22 | July 2019

© BittWare 2019

UltraScale+, Kintex, and Vivado are registered trademarks of Xilinx Corp. All other products are the trademarks or registered trademarks of their respective holders.

BittWare
a **molex** company