



AUTHORIZED DISTRIBUTOR

AVNET[®] ABACUS



TE Connectivity:
Sensor application guide

Sensor application guide

TE Connectivity (TE) is a global technology leader, providing connectivity and sensor solutions essential in today's increasingly connected world. TE is one of the largest sensor companies in the world. Our sensors are vital to the next generation of data driven technology. Our portfolio of intelligent, efficient and high-performing sensor solutions are used for customers across a broad range of industries and applications.

Explore the possibilities by utilizing TE's Sensor Application Guide to help transform concepts into smart, connected creations.



SENSOR SOLUTIONS

- HUMIDITY
- TEMPERATURE
- POSITION
- PRESSURE
- ULTRASONIC
- PHOTO OPTIC



IoT READY SENSOR

		AEROSPACE AND DEFENCE	AGRICULTURE	APPLIANCES	AUTOMATION AND CONTROL	AUTOMOTIVE	DATA AND DEVICES	INDUSTRIAL	ICT	INTELLIGENT BUILDINGS	MEDICAL	OIL AND GAS	TEST AND MEASUREMENT
MS5525DSO PRESSURE SENSOR				●	●		●	●		●	●	●	
MS5837-02BA PRESSURE SENSOR							●				●		
M5600 DIGITAL WIRELESS TRANSDUCER			●		●			●		●			
U5600 DIGITAL WIRELESS TRANSDUCER					●					●	●	●	
HTU2XY RELATIVE HUMIDITY AND TEMPERATURE SENSOR			●	●	●	●				●	●		
HM1500LF HUMIDITY SENSOR			●					●		●			●
TSYS01/02 DIGITAL TEMPERATURE SENSOR				●	●		●			●	●		
TSD SERIES DIGITAL THERMOPILE TEMPERATURE SENSORS					●			●		●			
SURFACE MOUNT FLAG TERMINAL TEMPERATURE PROBE				●	●			●		●			
TPE OVERMOLD TEMPERATURE PROBE				●	●			●		●			
TPE OVERMOLD TEMPERATURE PROBE WITH STAINLESS STEEL HOUSING				●	●			●		●			
PIPE PROBE TEMPERATURE SENSOR								●		●			
MBD AND MCD SERIES THERMISTOR PROBES					●			●			●		●
10K3CG LEADLESS CHIP GOLD NTC TEMPERATURE SENSOR		●					●	●					
AD-101 ULTRASONIC/ OPTIC SENSOR			●	●				●			●		
SMT PHOTO OPTIC / SPO2 COMPONENTS											●		
DOG2 MEMS INCLINOMETER		●	●		●				●				

● Market application examples found in the guide | ● Market served but not represented in guide

Sensor application guide



PRESSURE SENSORS

MS5525DSO PRESSURE SENSOR

- Medical ventilator
- UAV airspeed measurement
- Pneumatic control systems
- HVAC control
- Gas flow monitor

MS5837-02BA PRESSURE SENSOR

- Fitness watch
- Swim watch
- Multi sport watch
- e-cigarettes
- Dive computers
- Mobile altimeters/barometers

6

M5600 DIGITAL WIRELESS TRANSDUCER 10

- HVACR systems
- Pool/spa pumps
- Engine test stands
- Agriculture pumps

U5600 DIGITAL WIRELESS TRANSDUCER 11

- HVACR systems
- Medical equipment
- Water treatment facilities
- Storage tank liquid level

8

HUMIDITY SENSORS

HTU2XY RELATIVE HUMIDITY AND TEMPERATURE SENSOR

- HVACR systems
- Refrigerators
- Medical CPAP
- Security cameras
- Home comfort
- Washer/dryer

12

HM15X0LF HUMIDITY PROBE

14

- HVACR systems
- Lab test chambers
- Clean room
- Environmental monitoring

TEMPERATURE SENSORS

TSYS01/TSYS02 DIGITAL TEMPERATURE SENSORS 15

- HVACR systems
- Home healthcare
- Mobile devices
- Weather stations
- Home comfort
- Wireless systems

MBD AND MCD SERIES THERMISTOR PROBES 17

- Medical catheters
- Peltier coolers
- Flow sensors
- Miniature probe assemblies

TSD SERIES DIGITAL THERMOPILE SENSORS 18

- Temperature scanning
- Microwave oven
- Roll/drum printer, copiers and laminators
- Presence/occupation detection

SURFACE MOUNT FLAG TERMINAL TEMPERATURE PROBE 19

- Power supplies/heatsinks
- Servo motors
- Appliances
- HVACR systems
- Medical equipment
- Alternative energy

TPE OVERMOLD PROBE 21

- Residential HVAC systems
- Commercial refrigeration
- Heat pumps
- Container storage

TPE Overmold Probe with SS Housing 22

- HVAC chiller systems
- Commercial refrigeration
- Heat pumps
- Container storage

10K3CG LEADLESS CHIP GOLD NTC TEMPERATURE SENSOR 23

- Laser LED thermal monitoring
- Fiber-optic communications
- Thermopile reference sensor
- Local thermal protection

ULTRASONIC AND OPTICAL SENSORS

AD-101 AIR BUBBLE DETECTOR 24

- Medical infusion pumps
- Industrial inkjet printers
- Food and beverage production
- Dialysis equipment
- Hydroponic farming
- Pharmaceutical production

SMT PHOTO OPTIC / SPO2 COMPONENTS 26

- Pulse oximetry
- Finger probes
- Ear probes
- Disposable

POSITION SENSORS

DOG2 MEMS INCLINOMETER 27

- Cranes and hoists
- Dump trucks
- Bucket position
- Cabin leveling
- Paving equipment
- RV leveling

Pressure sensors

MS5525DSO PRESSURE SENSOR



MEDICAL VENTILATOR



FEATURE	FUNCTION	BENEFIT
Wide pressure range	Address a large array of applications	One product can be used for many applications
Differential pressure measurements	Facilitates flow rate measurements	Accurate monitoring of critical medical equipment

UAV AIRSPEED MEASUREMENT



FEATURE	FUNCTION	BENEFIT
Small footprint and weight	Fits into compact assemblies	Reduces total aircraft weight
Very low power requirements	Enough energy to operate the sensor efficiently	Helps extend flight times and battery life

PNEUMATIC CONTROL SYSTEMS



FEATURE	FUNCTION	BENEFIT
Low pressure capability	Able to monitor small pressure changes	Compatible with typical low pressure control systems
Available in gauge, differential, compound ranges	Variety of pressure references available	Easily adapts to different pneumatic systems

HVAC CONTROL



FEATURE	FUNCTION	BENEFIT
Low pressure capability	Able to monitor small pressure changes	Compatible with air pressures typically found in ductwork
Differential pressure sensing capability	Measures the difference between two applied pressures	Adapts to air flow measurement equipment

MS5525DSO PRESSURE SENSOR



GAS FLOW MONITORING



FEATURE	FUNCTION	BENEFIT
Small size	Ability to fit into compact assemblies	Easy to integrate into high density electronic packaging
I ² C or SPI interface	For data communications	Easy interface to a microcontroller

BLOOD PRESSURE MONITOR



FEATURE	FUNCTION	BENEFIT
Sleep mode available	Puts sensor into very low power mode	Ideal for battery powered products
High accuracy measurements	Provide reliable data to the system	Numbers provide to the patient are correct

Pressure sensors

MS5837-02BA PRESSURE SENSOR



FITNESS WATCH



FEATURE	FUNCTION	BENEFIT
Designed for harsh environments	Able to withstand abuse	Ideal for products used by active people
Very small footprint	Fit into compact assemblies	Adapts easily to high density packaging

SWIM WATCH



FEATURE	FUNCTION	BENEFIT
Gel seal over pressure port	Allows sensor to be submerged	Adapts to water and underwater activities
I ² C interface	Data communication	Easy interface to a microcontroller

MULTI-SPORT WATCH



FEATURE	FUNCTION	BENEFIT
I ² C interface	Communicates pressure data	Adapts easily to digital electronics
Sleep mode	Puts sensor into very low power configuration	Extends device battery life

E-CIGARETTES



FEATURE	FUNCTION	BENEFIT
Very small footprint	Fit into compact assemblies	Adapts easily to high density packaging
Gel seal over pressure port	Protects from moisture and debris	Reliable operation in harsh environments

MS5837-02BA PRESSURE SENSOR



BICYCLE COMPUTERS



FEATURE	FUNCTION	BENEFIT
Gel seal over pressure port	Protects sensor internal components	Provides reliable service when exposed to weather and the elements
I ² C interface	Data communication	Easy interface to a system microcontroller

MOBILE ALTIMETERS/BAROMETERS



FEATURE	FUNCTION	BENEFIT
Very high resolution	Able to detect very small changes in pressure	Accurate altitude data for the system
Sleep mode	Puts sensor into very low power configuration	Extends device battery life

Pressure sensors

M5600 DIGITAL WIRELESS TRANSDUCER



HVACR SYSTEMS



FEATURE	FUNCTION	BENEFIT
Wireless communications	Send sensor data to a remote system control	Eliminate installation cost of signal wiring
MicroFused™ front end design	Provide a ruggedized sensing element	Withstand compressor pressure spikes
Available with integral valve depressor	Compatible with standard Schrader valves	Easy attachment to typical HVAC systems

POOL/SPA PUMPS



FEATURE	FUNCTION	BENEFIT
316L stainless front end	Process fitting with integrated sense elements	Resists corrosion from pool/spa water
Sensor is battery powered	Self contained power for all sensor operations	Eliminates wiring costs and cable failure points
Weatherproof IP67 rated housing	Protects sensor interior from moisture and debris	Survives outdoors without any special enclosures

ENGINE TEST STANDS



FEATURE	FUNCTION	BENEFIT
Wireless communications and battery powered	Makes sensor completely self-contained	Easy install and removal during test cycles
Rugged enclosure with IP67 rating	Protect sensor interior from abuse	Able to survive rough handling in use
Many standard process fitting configurations	Mates with the device under test	Eliminates fitting adaptors or special connections

AGRICULTURE PUMPS



FEATURE	FUNCTION	BENEFIT
Very low power requirements	Sensor is battery powered with long battery life	Excellent for low power and energy harvesting
316L stainless front end	Inert process fitting with integrated sense elements	Sensor is compatible with injected fertilizers
Weatherproof IP67 rated housing	Protects sensor interior from moisture and debris	Survives outdoors without any special enclosures

U5600 DIGITAL WIRELESS TRANSDUCER



HVACR SYSTEMS



FEATURE	FUNCTION	BENEFIT
Wireless communications	Send sensor data to a remote system controller	Eliminate installation cost of signal wiring
Ultrastable® front end design	Provides a high accuracy low pressure output	Accurate monitoring of air duct pressures
Temperature output	Provides data on ambient temperature	Eliminates the need for a separate temp sensor

MEDICAL EQUIPMENT



FEATURE	FUNCTION	BENEFIT
316L stainless front end	Process fitting connecting to the equipment	Compatible with fluids in medical procedures
Sensor is battery powered	Self contained power for all sensor operations	Eliminates wiring costs and cable failure points
Wireless communication	Sends sensor data to the nurse station	Reduces cable "clutter" around the patient

WATER TREATMENT FACILITIES




FEATURE	FUNCTION	BENEFIT
Wireless communications and battery powered	Makes the sensor self contained	No need for long and expensive wire runs
Rugged enclosure with IP67 rating	Protect sensor from corrosive fluids and gasses	Able to survive exposure to treatment chemicals
Many standard process fitting configurations	Mates with a variety of machines and equipment	Eliminates fitting adaptors or special connections

STORAGE TANK LIQUID LEVEL



FEATURE	FUNCTION	BENEFIT
Accurate measure at very low pressures	Able to monitor small pressure fluctuations	Very accurate indication of liquid level in the tank
316L stainless front end	Corrosion resistant process fitting	Sensor is compatible with different types of liquids
Weatherproof IP67 rated housing	Protects sensor interior from moisture and debris	Survives outdoors without any special enclosures

Humidity sensors



HTU2XY RELATIVE HUMIDITY AND TEMPERATURE SENSOR



HVACR SYSTEMS



FEATURE	FUNCTION	BENEFIT
Measures full range of humidity from 0 to 100%	Provide accurate data in any condition	Accurate inputs to the central control system
Embedded temperature sensor	Measure ambient temperature	Provides accurate compensation for the humidity sensor

REFRIGERATORS



FEATURE	FUNCTION	BENEFIT
1.5 to 3.6 operating voltage	Power for the sensor	Compatible with any fridge power source
Small size 3.0 x 3.0 x 0.9 mm	Saves material costs	Fits well on high density PC boards

MEDICAL CPAP



FEATURE	FUNCTION	BENEFIT
PTFE filter over sensor active area	Prevents accumulation of debris and water	Reliability in hostile environments
Humidity and temperature outputs available	Act as a multi-sensor module	Able to calculate dew point providing three data points

SECURITY CAMERAS



FEATURE	FUNCTION	BENEFIT
Accurate measurements near 0% RH	Provides full scale span accurately	Able to detect leaks in hermetically sealed enclosures
Very low standby current; less than one microamp	Provides power to maintain electronics activity	Extends life of standby battery power



HTU2XY RELATIVE HUMIDITY AND TEMPERATURE SENSOR




HOME COMFORT



FEATURE	FUNCTION	BENEFIT
Small size SMD mountable package	Standard package for PC board assemblies	Fits into very dense electronic packaging
Accurate measurement over full range	Measures 0 to 100% RH within spec	Ensures proper operation of system under any conditions

WASHER/DRYER

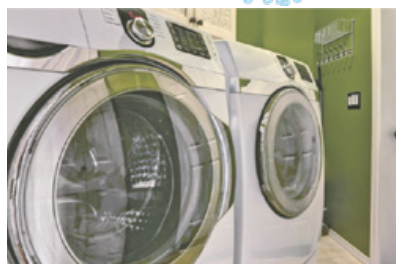

FEATURE	FUNCTION	BENEFIT
Rugged small footprint packaging	Able to withstand harsh environments	Reliable sensor functions over the life of the machine
Sensor withstands moisture and condensation	Once dried, the sensor works normally again	Occasional spills don't affect long term performance

Humidity sensors

HM15x0LF HUMIDITY PROBE



HVACR SYSTEMS



FEATURE	FUNCTION	BENEFIT
3 to 10 VDC power required	Make the sensor operational	Adapts easily to systems that use different voltages
Able to withstand contact with water	Operation is normal after drying from water contact	No maintenance after severe condensation
Only 2 mA of current required	Power for the sensor	Energy efficient and only low voltage wiring needed

LAB TEST CHAMBERS



FEATURE	FUNCTION	BENEFIT
0 to 100% humidity measurement	Provide full range output	Covers every possible condition in the chamber
Analog output	Provides sensor reading to control system	Analog signals are easy to interface
60mm x 15mm package size	Compact size to be unobtrusive	Saves space and reduces temp and humidity loading

CLEAN ROOM



FEATURE	FUNCTION	BENEFIT
Small size	Convenient packaging	Unobtrusive and able to fit into tight spaces
Full range sensitivity of 0 to 100% RH	Output data from the sensor	Able to monitor any condition that occurs
Low voltage and low current requirements	Provides device power	Easy to power from convenient sources

ENVIRONMENTAL MONITORING



FEATURE	FUNCTION	BENEFIT
Rugged but simple enclosure	Protect internal components	Able to survive outdoor environments
Low voltage and low current required	Provides device power	Easy to power from energy harvested sources
No damage from exposure to water	Sensor recovers fully when dried out	Withstand precipitation and condensation

Temperature sensors



TSYS01/TSYS02 DIGITAL TEMPERATURE SENSORS



HVACR SYSTEMS



FEATURE	FUNCTION	BENEFIT
Factory calibrated	True plug and play operation	Accurate inputs to the central control system; no calibration
High accuracy	Measure ambient air temperature or system temperatures	Provides accurate reading for personal comfort or for efficient machine operation

HOME HEALTHCARE



FEATURE	FUNCTION	BENEFIT
Fast conversion time	Provides fast and accurate temperature readings	Allows accurate readings and continuous monitoring of critical information
Complete solution – system in a package	Combines temperature sensor, ADC converter and digital output circuitry	Saves design time, lower overall cost, higher accuracy

MOBILE DEVICES



FEATURE	FUNCTION	BENEFIT
Small size	Minimises board space and overall part profile	Fits into very dense electronic packaging
Low power operation	Able to be put into sleep mode, operates with μA of current	Excellent for battery powered systems; minimises power drain

WEATHER STATIONS



FEATURE	FUNCTION	BENEFIT
Accurate temperature measurements	Provides temperature accuracies down to $\pm 0.1^\circ\text{C}$	Able to provide accurate temperature information for residential and commercial applications
Operates over a wide temperature range	Operates from -40°C to $+125^\circ\text{C}$	Able to operate outdoors and in extreme conditions

Temperature sensors



TSYS01/TSYS02 DIGITAL TEMPERATURE SENSORS



HOME COMFORT



FEATURE	FUNCTION	BENEFIT
Small size SMD mountable package	Standard package for PC board assemblies	Fits into very dense electronic packaging
Accurate temperature measurement over a wide range of temperatures	Accuracies down to $\pm 0.1^{\circ}\text{C}$ from -5°C to $+50^{\circ}\text{C}$	Ensures proper operation of the system under any conditions

WIRELESS SYSTEMS



FEATURE	FUNCTION	BENEFIT
Very low power	Only active when data is needed; operates with only μA of power	Excellent for battery powered systems; minimises power drain
Digital interface	Utilise industry standard I ² C or SPI interfaces	Easy to interface to; minimises programming

Temperature sensors

MBD AND MCD SERIES THERMISTOR PROBES




MEDICAL CATHETERS



FEATURE	FUNCTION	BENEFIT
Small size	Designed for range of intrusive catheter based products	More comfortable to patient, less post operative issues
Very fast time response	Fast response to changes in temperature	Allows doctors to see activity in real time
Standard polyimide housing	Provides consistent size and protects sensing element and insulates sensor electrical	Allows for easy, cost effective installation and rugged design

PELTIER COOLERS

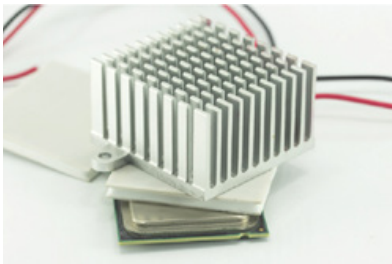

FEATURE	FUNCTION	BENEFIT
Rugged design	Suitable for a range of industrial and medical applications	Provides excellent reliability
Accurate thermistor sensor	Provides accurate feedback information to controller	Allows for easy installation on a variety of tube sizes
Customisable tolerances and lengths	Usable in a variety of locations in the system	Provides good cost/performance ratio

FLOW SENSORS



FEATURE	FUNCTION	BENEFIT
Small size	Provides fast response to changes in flow	Allows for easy analysis of flow rates and changes
Compatible materials	Probe materials compatible with a wide range of applications	Allow easier approval for new products
Available in a range of sizes and other options	Compatible with most control systems	Allows faster time to market and more choices for designers

MINIATURE PROBE ASSEMBLIES



FEATURE	FUNCTION	BENEFIT
Custom lengths and other options available	Allows use in wide range of systems	Eliminates splices and minimises overall cost
Small, consistent head size	Provides rugged and reliable design	Provides cost efficient assembly and reliable designs
Simple, elegant design	Allows range of options and efficient assembly	Maximises flexibility and minimises cost

Temperature sensors



TSD SERIES DIGITAL THERMOPILE SENSORS



TEMPERATURE SCANNING



FEATURE	FUNCTION	BENEFIT
Non-contact measurement	Sensor element does not have to contact skin	Prevents contamination and debris collection
Digital output signal	Basic sensor information for the electronics	Digital output is an easy interface with a microprocessor
Small size	Ability to fit limited spaces	Easy to apply to handheld devices and products

MICROWAVE OVEN



FEATURE	FUNCTION	BENEFIT
Thermopile field of view	Accommodates various microwave cooking areas	Insensitive to the size of food item
Non-contact measurement	Can measure temperature accurately from a distance	Measure food temperature while it's rotating
Sensor housing is sealed	Eliminates problems from dust, dirt, debris	Food spatter and spills do not damage the sensor

ROLL/ DRUM PRINTER, COPIERS AND LAMINATORS



FEATURE	FUNCTION	BENEFIT
Non-contact measurements	Measures temperature without physical contact	Easy to measure the temp of rotating surfaces
Narrow field of view	Measures a small surface area accurately	Is not affected by background temperatures
Digital signal output	Sends digital temperature info to system controller	Simple interface, no A/D conversion required

PRESENCE/ OCCUPANCY DETECTION



FEATURE	FUNCTION	BENEFIT
Continuous detection of thermal sources in a space	Sensitive to single or multiple heat sources	Excellent for occupancy sensing of rooms
Signal path from heat source is DC steady state	Continuous output signal when heat source present	Monitor a space when occupants are stationary
Narrow field of view versions are available	Allows sensor to focus on a small area of interest	Area discrimination when optic elements (lens) used

Temperature sensors



SURFACE MOUNT FLAG TERMINAL TEMPERATURE PROBE



POWER SUPPLIES / HEATSINKS



FEATURE	FUNCTION	BENEFIT
Rugged construction	Designed for long life	Minimises field failures and need for replacement
Copper housing	Fast thermal transfer	Overheat and failure conditions are sensed quickly
Available with wide range of R25 values and curves	Compatible with most standard controls	Can be used with most temperature control systems worldwide

SERVO MOTORS



FEATURE	FUNCTION	BENEFIT
Operating temp range from -40°C to +125°C	Covers most industrial application temp ranges	One design fits many applications
Range of ring terminal sizes available	Suitable for a wide range of motor sizes	Design can be used on a range of products
Customisable tolerances and accuracies	Usable in a variety of locations in the system	Provides good cost/performance ratio

APPLIANCES



FEATURE	FUNCTION	BENEFIT
NTC thermistor element	Provides for a cost effective design	Can be used in cost critical applications
Available in a range of wire lengths and connectors	Flexible design, compatible with many systems	Eliminates fitting adaptors or special connections

MINIATURE PROBE ASSEMBLIES



FEATURE	FUNCTION	BENEFIT
Custom cable lengths and other options available	Allows use in wide range of systems	Eliminates splices and minimises overall cost
Available in a range of R25 values and curves	Compatible with most HVACR controls	No need for special programming or changes

Temperature sensors



SURFACE MOUNT FLAG TERMINAL TEMPERATURE PROBE



MEDICAL EQUIPMENT



FEATURE	FUNCTION	BENEFIT
Range of sensor accuracies available	Suitable for high accuracy applications	Accurate monitoring of critical medical equipment
Simple, rugged design	Designed for long life	Minimises field failures and need for replacement

ALTERNATIVE ENERGY



FEATURE	FUNCTION	BENEFIT
Small footprint and weight	Fits into compact assemblies	Reduces total weight and cost
Can accommodate thermistors, RTDs and other sensing elements	Compatible with standard solar controls	Can be used with most systems worldwide

Temperature sensors

TPE OVERMOLD PROBE



RESIDENTIAL HVAC SYSTEMS




FEATURE	FUNCTION	BENEFIT
Rugged construction	Designed for long life	Minimises field failures and need for replacement
Standard housing design	Can be used with or without clip	Allows for easy installation in chiller systems
Available with wide range of R25 values and curves	Compatible with most standard HVAC controls	Can be used with most HVAC systems worldwide

COMMERCIAL REFRIGERATION



FEATURE	FUNCTION	BENEFIT
IP68 rated	Great for high moisture and freeze/thaw applications	Provides excellent reliability
Available with a range of clip sizes	Can be mounted directly to refrigerant tubes	Allows for easy installation on a variety of tube sizes
Customisable tolerances and accuracies	Usable in a variety of locations in the system	Provides good cost/performance ratio

HEAT PUMPS

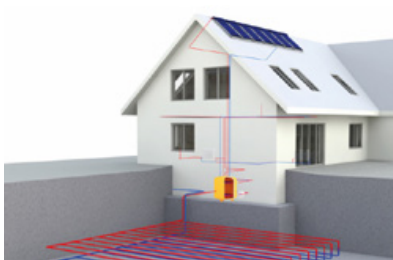

FEATURE	FUNCTION	BENEFIT
Double insulated design	Provides good electrical/mechanical specifications	Allows for easy approval for regulatory controlled systems
Rugged design with IP68 rating	Highly moisture resistant and good for freeze/thaw	Provides years of reliable operation in critical systems
Available in a range of connector options	Compatible with most control systems	Eliminates fitting adaptors or special connections

CONTAINER STORAGE



FEATURE	FUNCTION	BENEFIT
Custom lengths and other options available	Allows use in wide range of systems	Eliminates splices and minimises overall cost
Overmolded TPE subassembly	Provides rugged and reliable design	Prevents field failures
Simple, elegant design	Allows range of options and efficient assembly	Maximises flexibility and minimises cost

Temperature sensors

TPE OVERMOLD PROBE WITH SS HOUSING



HVAC CHILLER SYSTEMS



FEATURE	FUNCTION	BENEFIT
Rugged construction	Designed for long life	Minimises field failures and need for replacement
Standard bullet housing design	Can be used with or without well	Allows for easy installation in chiller systems
Available with wide range of R25 values and curves	Compatible with most standard HVAC controls	Can be used with most HVAC systems worldwide

COMMERCIAL REFRIGERATION



FEATURE	FUNCTION	BENEFIT
IP68 rated	Great for high moisture and freeze/thaw applications	Provides excellent reliability
Available with a range of clip sizes	Can be mounted directly to refrigerant tubes	Allows for easy installation on a variety of tube sizes
Customisable tolerances and accuracies	Usable in a variety of locations in the system	Provides good cost/performance ratio

HEAT PUMPS



FEATURE	FUNCTION	BENEFIT
Double insulated design	Provides good electrical/mechanical specifications	Allows for easy approval for regulatory controlled systems
Rugged design with IP68 rating	Highly moisture resistant and good for freeze/thaw	Provides years of reliable operation in critical systems
Available in a range of connector options	Compatible with most control systems	Eliminates fitting adaptors or special connections

CONTAINER STORAGE



FEATURE	FUNCTION	BENEFIT
Custom lengths and other options available	Allows use in wide range of systems	Eliminates splices and minimises overall cost
Overmolded TPE subassembly	Provides rugged and reliable design	Prevents field failures
Simple, elegant design	Allows range of options and efficient assembly	Maximises flexibility and minimises cost

Temperature sensors



10K3CG LEADLESS CHIP GOLD NTC TEMPERATURE SENSOR



LASER LED THERMAL MONITORING




FEATURE	FUNCTION	BENEFIT
Gold electrodes on both sides of the NTC chip	Forms electrical contacts	High thermal conductivity, easy to solder and wire bond
Small size and mass	Reduce thermal inertia	Fast response to changes in temperature

FIBER-OPTIC COMMUNICATIONS



FEATURE	FUNCTION	BENEFIT
Parts are interchangeable	Performance parameters are uniform part to part	Uniform results on multichannel applications
Low profile chip design	Easy to mount on a substrate	Fits well into products that are space or dimension limited

THERMOPILE REFERENCE SENSOR

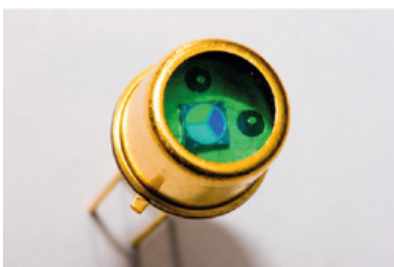

FEATURE	FUNCTION	BENEFIT
NTC sensing element	Provides predictable and uniform output performance	Improves the output accuracy of total product
Gold contacts	Make electrical connections	Compatible with many contact surfaces (plated header, solder, wire bond wire)

LOCAL THERMAL PROTECTION



FEATURE	FUNCTION	BENEFIT
Small size and low profile	Reduce volume and thermal mass	Fits into tight spaces and under thermal producing components
Gold contacts	Make electrical connections	Excellent thermal transfer to provide fast response to temperature changes

Ultra sonic and optical sensors



AD-101 AIR BUBBLE DETECTOR

MEDICAL INFUSION PUMPS



FEATURE	FUNCTION	BENEFIT
Non-invasive measurements	Detect bubbles without making contact to the liquid	Eliminates the chance of contamination
Compatible with different tube diameters	Provides good acoustic contact with the tubing	Able to work with a variety of infusion systems

INDUSTRIAL INKJET PRINTERS



FEATURE	FUNCTION	BENEFIT
Fast detection of bubbles	Indication provided within 2.0 ms of detection	Alerts the machine of a problem before damage occurs
Broad operating voltage range	Powers the sensor	Easy to power from any voltage available in the machine

FOOD AND BEVERAGE PRODUCTION



FEATURE	FUNCTION	BENEFIT
Detects large interruptions in liquid flow	Senses any bubble size greater than 70% of tube I.D.	Ensures proper filling of package containers
Non-invasive detection	Measures bubble through tubing wall	Assures food safety by eliminating contamination

DIALYSIS EQUIPMENT



FEATURE	FUNCTION	BENEFIT
Non-invasive detection	Senses bubbles without contacting the liquid	Not possible to introduce bacteria via the sensor
Sensor has a built-in diagnostic capability	Continuous monitoring of sensor operation	Provides an instant notification of a sensor malfunction

Ultra sonic and optical sensors



AD-101 AIR BUBBLE DETECTOR



HYDROPONIC FARMING



FEATURE	FUNCTION	BENEFIT
Able to determine a no-liquid condition in the tube	Response to air in the tubing	Quickly detects interruption of irrigation flow
Adapts to various size tubing	Connection of the sensors to the liquid flow	Eliminates need for special adaptors

PHARMACEUTICAL PRODUCTION



FEATURE	FUNCTION	BENEFIT
Detects large interruptions in liquid flow	Senses any bubble size greater than 70% of tube I.D.	Ensures each package contains proper medication dose
Continuous self test feature in the sensor	Indication provided if sensor is malfunctioning	Ensures vial is filled with proper dosage of medication

Ultra sonic and optical sensors

SMT PHOTO OPTIC / SPO₂ COMPONENTS



PULSE OXIMETRY



FEATURE	FUNCTION	BENEFIT
Tight tolerance on red LED wavelength	Precision is driven by proprietary emitters spectrally matched to function with a detector	More precision in acute medical conditions can mean the difference between life and death
Reflow solderable	Decreases manual soldering processes	Enable medical device designers to design products with reduced overall cost due to reduced labor as well as increased quality

FINGER PROBES



FEATURE	FUNCTION	BENEFIT
High reliability	Proven track record in quality and reliability	Great overall value in cost and performance
Flexibility to meet any customer's requirements	Dual drive emitters, both red and IR	Able to meet a wide range of customer specifications and needs

EAR PROBES



FEATURE	FUNCTION	BENEFIT
Scalable, value-added manufacturing	Can meet large component volume requirements	On-time delivery, even in large quantities saves time and money
Gold contacts	Make electrical connections	Compatible with many contact surfaces (plated header, solder, wire bond wire)

DISPOSABLE



FEATURE	FUNCTION	BENEFIT
Spectrally paired photodetectors components	Matches wavelength of emitter LEDs	Allow easy and reliable matching of emitter and detector
Includes both photo optic components and complete sensor solutions	Wide range of products	Provides greater flexibility for OEM manufacturers

Ultra sonic and optical sensors



DOG2 MEMS INCLINOMETER

CRANES AND HOISTS



FEATURE	FUNCTION	BENEFIT
Simple two-bolt mounting feature	Attach sensor to moving equipment	Simple attachment to any available mounting surface
Rugged construction	Protect the sensor components and corresponding benefit	Sensors can be used in harsh environments

DUMP TRUCKS



FEATURE	FUNCTION	BENEFIT
Senses in both X and Y axis	Determine tilt in any direction	Adapts well to mobile applications
J1939 CAN interface	Communicates data to the system	Compatible with industry standard systems

BUCKET POSITION



FEATURE	FUNCTION	BENEFIT
Angular capability of $\pm 90^\circ$	Covers a large range of motion	Adapts to applications with significant movement
IP-65 enclosure	Protect sensor interior from dust, dirt, debris	Reliable operation in "dirty" environments

CABIN LEVELING



FEATURE	FUNCTION	BENEFIT
$\pm 0.5^\circ$ accuracy	Sends precision data to the host system	Leveling feature provides operator comfort
Operating temperature is -40 to $+85^\circ\text{C}$	Accurate tilt information in a variety of conditions	Reliable operation in environmental extremes

Ultra sonic and optical sensors



DOG2 MEMS INCLINOMETER

PAVING EQUIPMENT



FEATURE	FUNCTION	BENEFIT
8 – 30 VDC operation	Power for the DOG2	Adapts to a wide variety of machine electrical systems
±0.5° accuracy	Sends precision data to the host system	Ensures pavement tilts and angles are correct

RV LEVELING



FEATURE	FUNCTION	BENEFIT
Senses in both X and Y axis	Determine tilt in any direction	Makes operations simple for the owner
8 – 30 VDC operation	Power for the DOG2	Adapts to the variety of electrical systems found on RVs

Speak to your local sales representative, or visit the TE Connectivity sensor website at: avnet-abacus.eu/te-connectivity-sensors

Offices

AUSTRIA

Schönbrunner Str. 297-307
A-1120 Vienna
Phone: +43 1 86642 0
Fax: +43 1 86642 250
wien@avnet-abacus.eu

BELARUS

c/o Avnet Abacus Russia
Office 26, Building 2
10 Korovinskoye Shosse,
127486 Moscow
Phone: +7 (495) 737 3689
Fax: +7 (495) 737 3686
belarus@avnet-abacus.eu

BELGIUM

De Kleetlaan 3
1831 Diegem
Phone: +32 2 227 2000
diegem@avnet-abacus.eu

BULGARIA

c/o Avnet Abacus Austria
Schönbrunner Str. 297-307
A-1120 Vienna
Phone: +43 1 86642 0
Fax: +43 1 86642 250
bulgaria@avnet-abacus.eu

CROATIA

c/o Avnet Abacus Slovenia
Dunajska Cesta 167
1000 Ljubljana
Phone: +386 (0)1 560 97 54
Fax: +386 (0)1 560 98 78
croatia@avnet-abacus.eu

CZECH REPUBLIC

c/o Avnet Abacus Austria
Schönbrunner Str. 297-307
A-1120 Vienna
Phone: +43 1 86642-0
Fax: +43 1 86642 250
praha@avnet-abacus.eu

DENMARK

Knudlundvej 24
DK-8653 Them
Phone: +45 86 84 84 84
Fax: +45 86 84 82 44
them@avnet-abacus.eu

Lyskær 9, DK-2730 Herlev
Phone: +45 86 84 84 84
Fax: +45 43 29 37 00
herlev@avnet-abacus.eu

EGYPT

Canan Residence
Hendem Cad.
No:54 Ofis A2
Serifali Umraniye Istanbul
TR - 34775 Turkiye
Phone: +90 216 52 88 370
Fax: +90 216 52 88 377
egypt@avnet-abacus.eu

ESTONIA

Aida 5,
EE-80011 Pärnu
Phone: +372 56637737
paernu@avnet-abacus.eu

FINLAND

Pihatörmä 1 B
FI-02240 Espoo
Phone: +358 (0) 207 499 220
Fax: +358 (0) 207 499 240
espuu@avnet-abacus.eu

FRANCE

Immeuble Carnot Plaza
14 Avenue Carnot
91349 Massy Cedex, Paris
Phone: +33 (0) 1 6447 2929
Fax: +33 (0) 1 6447 9150
paris@avnet-abacus.eu

8 chemin de la Terrasse
Bat D ter étage
31500 Toulouse
Phone: +33 (0) 5 6247 4787
Fax: +33 (0) 5 6247 4761
toulouse@avnet-abacus.eu

35 avenue des Peupliers
Les Peupliers2
35510 Cesson
Phone: +33 (0) 2 9983 7720
Fax: +33 (0) 2 9983 4829
rennes@avnet-abacus.eu

Parc Club du Moulin à Vent
Bât 10, 33 rue du Dr. G Lévy
F-69693 Vénissieux Cedex,
Lyon
Phone: +33 (0) 4 7877 1370
Fax: +33 (0) 4 7877 1391
lyon@avnet-abacus.eu

GERMANY

Englische Str. 27
D - 10587 Berlin
Phone: +49 (0) 30 790 997 0
Fax: +49 (0) 30 790 997 51
berlin@avnet-abacus.eu

Industriestr. 26
D-76297 Stutensee
Phone: +49 (0)7249 910 149
Fax: +49 (0)7249 910 177
stutensee@avnet-abacus.eu

Wilhelmstr. 1, D-59439
Holzwickede / Dortmund
Phone: +49 (0) 2301 2959 27
Fax: +49 (0) 2301 2959 29
dortmund@avnet-abacus.eu

Oehleckerring 9a - 13
22419 Hamburg
Phone: +49 (0) 40 608 23 59 0
Fax: +49 (0) 40 608 23 59 20
hamburg@avnet-abacus.eu

Gruber Str. 60c-60d
D-85586 Poing / Munich
Phone: +49 (0) 8121 777 03
Fax: +49 (0) 8121 777 531
muenchen@avnet-abacus.eu

Lina-Ammon-Str. 19 b
D-90471 Nürnberg
Phone: +49 (0) 911 244 250
Fax: +49 (0) 911 244 25 25
nuernberg@avnet-abacus.eu

Gutenbergstr. 15
D-70771 Leinfelden-
Echterdingen / Stuttgart
Phone: +49 (0) 711 78260 02
Fax: +49 (0) 711 78260 333
stuttgart@avnet-abacus.eu

Gaußstraße 10
D-31275 Lehrte
Phone: +49 (0) 5132 5099 0
Fax: +49 (0) 5132 5099 76
lehrte@avnet-abacus.eu

GREECE

c/o Abacus Avnet Austria
Schönbrunner Str. 297-307
A-1120 Vienna
Phone: +43 1 86642-0
Fax: +43 1 86642 250
greece@avnet-abacus.eu

HUNGARY

c/o Avnet Abacus Austria
Schönbrunner Str. 297-307
A-1120 Vienna
Phone: +43 1 86642-0
Fax: +43 1 86642 250
budapest@avnet-abacus.eu

IRELAND

c/o Avnet Abacus Bolton
Oceanic Building
Waters Meeting Road
Bolton BL1 8SW
Phone: +44 (0)1204 547170
Fax: +44 (0)1204 547171
bolton@avnet.eu

ISRAEL

Avnet Components Israel Ltd.
P.O. Box 48 Tel-Mond, 4065001
Phone: 972-9-7780280
Fax: 972-3-760-1115
avnet.israel@avnet.com

ITALY

Via Manzoni 44
I-20095 Cusano Milanino
(Milano)
Phone: +39 02 660 921
Fax: +39 02 66092 332
milano@avnet-abacus.eu

Viale dell'industria 23
I-35129 Padova
Phone: +39 049 7800 381
Fax: +39 049 7730 36
padova@avnet-abacus.eu

Via Zoe Fontana 220
I-00131 Roma
Phone: +39 06 4123 1952
Fax: +39 06 4192 618
roma@avnet-abacus.eu

Via Scaglia Est. 31/33
41126 Modena
Phone: +39 059 34891
Fax: +39 059 344993
modena@avnet-abacus.eu

Via Panciaticchi 40/11
I-50127 Firenze
Phone: +39 055 436 1928
Fax: +39 055 428 8810
firenze@avnet-abacus.eu

LATVIA

c/o Avnet Abacus Poland
Plac Solny 16
PL-50-062 Wroclaw
Phone: +48 71 34 205 99
Fax: +48 71 34 229 10
latvia@avnet-abacus.eu

LITHUANIA

c/o Avnet Abacus Poland
Plac Solny 16
PL-50-062 Wroclaw
Phone: +48 71 34 205 99
Fax: +48 71 34 229 10
lithuania@avnet-abacus.eu

NETHERLANDS

Stadionstraat 2, 6th fl.
NL-4815 NG Breda
Phone: +31 (0) 76 57 22 300
Fax: +31 (0) 76 57 22 303
breda@avnet-abacus.eu

NORWAY

Olaf Helsetsvvei 6, 0694 Oslo
P.O.Box 150 Oppsal, 0619 Oslo
Phone: +4722707664
Mobile: +4794895373
Fax: +4722707661
oslo@avnet-abacus.eu

POLAND

Plac Solny 16
PL-50-062 Wroclaw
Phone: +48 71 34 205 99
Fax: +48 71 34 229 10
wroclaw@avnet-abacus.eu

PORTUGAL

Tower Plaza, Rot. Eng. Edgar
Cardoso, 23, Pl. 14, Sala E
PT-4400-676 Vila Nova
de Gaia
Phone: +351 223 779502
Fax: +351 223 779503
portugal@avnet-abacus.eu

ROMANIA

c/o Avnet Abacus Slovenia
Dunajska Cesta 159
1000 Ljubljana
Phone: +386 (0)1 560 97 54
Fax: +386 (0)1 560 98 78
romania@avnet-abacus.eu

RUSSIA

Office 31, Building 2
10 Korovinskoye Shosse
127486 Moscow
Phone: +7 (495) 737 3689
Fax: +7 (495) 737 3686
Moscow@avnet-abacus.eu

SERBIA

c/o Avnet Abacus Slovenia
Dunajska Cesta 167
1000 Ljubljana
Phone: +386 (0)1 560 97 54
Fax: +386 (0)1 560 98 78
serbia@avnet-abacus.eu

SLOVAKIA

c/o Avnet Abacus Austria
Schönbrunner Str. 297-307
A-1120 Vienna
Phone: +43 1 86642-0
Fax: +43 1 86642 250
slovakia@avnet-abacus.eu

SLOVENIA

Dunajska Cesta 167
1000 Ljubljana
Phone: +386 (0)1 560 97 54
Fax: +386 (0)1 560 98 78
ljubljana@avnet-abacus.eu

SOUTH AFRICA

Ground Floor, Forrest House
Belmont Office Park
Belmont Road, Rondebosch
7700, Cape Town
Phone: +27 (0) 21 689 4141
Fax: +27 (0) 21 686 4709
sales@avnet.co.za

202 Chelmsford, 2nd Floor
Nelson Road, Essex Gardens,
Westville, 3629, Durban
Phone: +27 (0) 31 266 8104
Fax: +27 (0) 31 266 1891
sales@avnet.co.za

Block 3, Pinewood Office Park
33 Riley Road
Woodmead, 2191
Sandton, Johannesburg
Phone: +27 (0) 11 319 8600
Fax: +27 (0) 11 319 8650
sales@avnet.co.za

SPAIN

NyN Tower, C/ Tarragona,
151-157, Floor 19
ES-08014 Barcelona
Phone: +34 (0) 93 327 85 50
Fax: +34 (0) 93 425 05 44
barcelona@avnet-abacus.eu

Plaza Zabalgame
12 Bajo Izda,
Galdakao / Vizcaya
ES -48960 Bilbao
Phone: +34 (0) 94 457 0044
Fax: +34 (0) 94 456 8855
bilbao@avnet-abacus.eu

C/Chile, 10 2ª Plta.
Oficina 229
ES -28290 Las Matas / Madrid
Phone: +34 (0) 913 72 7200
Fax: +34 (0) 916 36 9788
madrid@avnet-abacus.eu

SWEDEN

Löfströms Allé 5,
Sundbyberg, Box 1830,
SE-171 27 Solna
Phone: +46 (0) 858 746200
Fax: +46 (0) 858 746 001
stockholm@avnet-abacus.eu

Smörhålevägen 3
SE-43442 Kungsbacka
Phone: +46 (0)18 58746 200
Fax: +46 (0)300 140 15
gothenburg@avnet-abacus.eu

SWITZERLAND

Bernstrasse 392
CH-8953 Dietikon
Phone: +41 (0) 43 322 49 90
Fax: +41 (0) 43 322 49 99
zurich@avnet-abacus.eu

TURKEY

Tatlisu Mahallesi,
Pakdil Sokak
No:5 B Blok Kat 2
34774 Umraniye
Istanbul Turbine
Phone: +90 216 52 88 370
Fax: +90 216 52 88 377
istanbul@avnet-abacus.eu

UK

First Floor, The Gatehouse
Gatehouse Road
Aylesbury, Bucks
HP19 8DB
Phone: +44 (0) 1296 678920
Fax: +44 (0) 1296 678939
Aylesbury@avnet.eu

Building 5
Waltham Park
White Waltham
Maidenhead
Berkshire SL6 3TN
Phone: +44 (0)1628 512900
Fax: +44 (0)1628 512999
maidenhead@avnet.eu

Avnet House
Rutherford Close
Meadway,
Stevenage

Hertfordshire SG1 2EF
Phone: +44 (0)1438 788 500
Fax: +44 (0)1438 788 250
stevenage@avnet.eu

Oceanic Building
Waters Meeting Road
Bolton
BL1 8SW
Phone: +44 (0)1204 547170
Fax: +44 (0)1204 547171
bolton@avnet.eu

UKRAINE

c/o Avnet Abacus Poland
Plac Solny 16
PL-50-062 Wroclaw
Phone: +48 71 34 205 99
Fax: +48 71 34 229 10
ukraine@avnet-abacus.eu

All trademarks and logos are the property of their respective owners. This document provides a brief overview only, no binding offers are intended. No guarantee as to the accuracy or completeness of any information. All information is subject to change, modifications and amendments without notice. Printed on FSC certified paper.